


RobLight

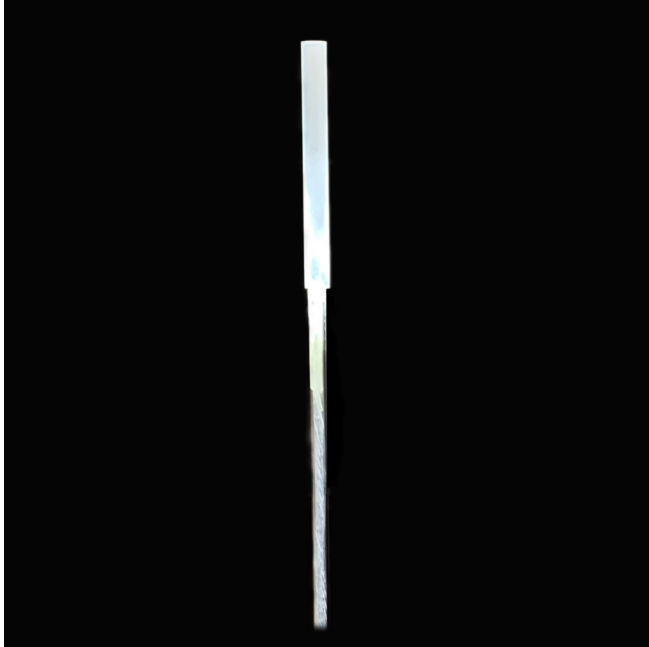

Swaying Reed, Acrylic tube &

User manual

RobLight

Introduction

The RobLight Swaying Reed is designed for outdoor environment with glass and PMMA fibre harness.

Product overview/unboxing

1 Swaying Reed, acrylic rod
1 User manual

Technical data

General

Light port	Ø6
Fibre type	PMMA
Material	POM, plastic and other
Dimensions (D x L)	Ø20 x L (depending on the model)
Weight (total)	300g (depending on the model)
Max bending angle	±45°
Product disposal	Please follow national rules

Warning

This product is designed for outdoor lighting application in standard garden environment only.

The products should not be used in environment where the public is supposed to touch/physically interact with the product.

We recommend that the products are shielded/fenced to the public as it can be dangerous to fall upon (specially the shorter variants).


Do not bend above the max. allowed bending angle.

For soft ground, we recommend using the mounting kit.

RobLight


Installation instructions

- Check that the end face of the polyconnector is clean and undamaged
- Remove the nut and rubber gasket, and put it on the fibre tail
- Insert the connector fully
- Tighten the screw



RobLight

Accessories

	Part name	Description	Item no.
	Ground Spike for Swaying reed	Mounting kit	4900 1400

Accessories installation



RobLight

RobLight A/S, Tunvej 120, DK-9900 Frederikshavn
T: +45 9244 4888, E: info@rob-light.com
www.rob-light.com

RobLight accepts no responsibility for possible errors in catalogues, brochures and other printed material.
RobLight reserves the right to alter or discontinue its products without notice. © 2019 RobLight A/S